

G80 Insulated Blank Swivel Model No. 8-088N

Main Features

- Design factor 4:1 proof tested and certified
- Tested acc. to DIN EN 1677
- Individually tested to resist 1000 Volts insulated with Test Certificate
- Designed for the protection of overhead cranes during welding operations on suspended loads

Certification:


Each unit comes fully certified with a test certificate or an EC Declaration of Conformity stating compliance with the essential health and safety requirements of the Machinery Directive 2006/42/EC, the Supply of Machinery (Safety) Regulations 2008 and Section 6 of the Health and Safety at Work Etc Act 1974.



Manufactured and tested in accordance with EN1677-1. All YOKE Lifting points meet or exceed all the requirements of ASME B30.26.

Technical Data

Product Code	Capacity (tonne)	For Grade 80 Chain (mm)	Dimensions (mm)		Net Weight (kg)
			D	L	
8-088N-07	2.00	7, 8	50	75	0.6
8-088N-10	3.15	10	62	94	1.2
8-088N-13	5.30	13	77	123	2.4
8-088N-16	8.00	16	94	143	4.2
8-088N-20	12.50	18, 20	109	164	6.7

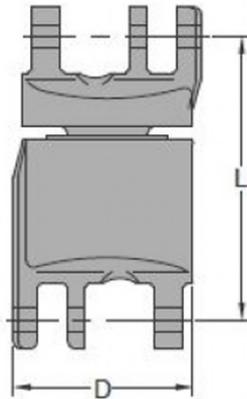

Due to our policy of continual product development, dimensions, weights and specifications may change without prior notice. Please check with your Tiger sales team when ordering.