


G100 Clevis Grab Hook Model No. X-042



Main Features

- Quenched and Tempered Alloy Steel
- At least 25 % greater WLL than traditional G80 products
- Manufactured in accordance with DIN PAS 1061, EN 1677-1 and ASTM A952/A 952M
- Certified by DGUV GS-OA-15-05
- Proof Load tested at 2.5 times the WLL with certification for each batch manufactured
- Design Factor 4:1
- Fatigue rated to 20,000 cycles at 1.5 times the WLL
- Tempering temperature minimum 400°C
- Not for use with Omega Link
- Enables full WLL while in use, thanks to supporting wings which prevent chain link deformation



Certification:


Each unit comes fully certified with a test certificate or an EC Declaration of Conformity stating compliance with the essential health and safety requirements of the Machinery Directive 2006/42/EC, the Supply of Machinery (Safety) Regulations 2008 and Section 6 of the Health and Safety at Work Etc Act 1974.

Manufactured and tested in accordance with EN1677-1. All YOKE Lifting points meet or exceed all the requirements of ASME B30.26.

Technical Data

Product Code	Capacity (tonnes)	For Grade 100 Chain (mm)	Dimensions (mm)						Net Weight (kg)
			A	B	F	G	K	P	
X-042-07	2.5	7, 8	10	30	22	54	93	10	0.4
X-042-10	4.0	10	11	41	29	78	128	13	0.8
X-042-13	6.7	13	15	52	38	99	165	17	1.6
X-042-16	10.0	16	18	57	45	114	195	21	2.7
X-042-20	16.0	20	22	73	52	130	222	24	4.8
X-042-22	19.0	22	24	70	56	139	247	26	6.4

Other sizes available - please ask for details.

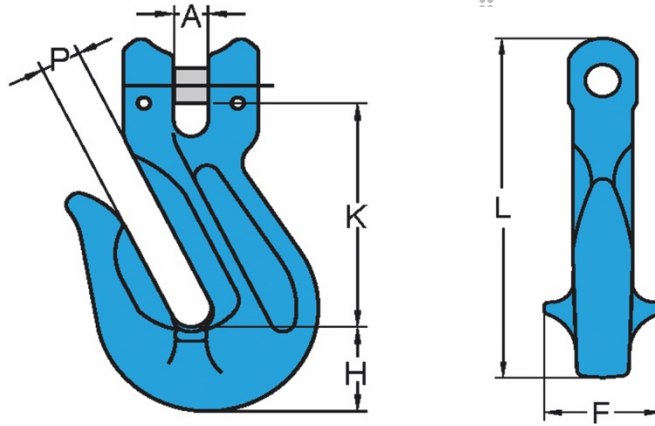

Due to our policy of continual product development, dimensions, weights and specifications may change without prior notice. Please check with your Tiger sales team when ordering.