

Home of the Tiger pneumatic hoisting, manual hoisting, clamping and winching ranges



Tiger Mini Range

Rugged steel body construction yet lightweight and portable



500kg lever hoist with belt bag

- 360-degree handle rotation
- Short stroke and low lever pulling effort
- Easy single-hand "freewheeling" operation
- Drop forged & heat-treated alloy hooks
- Safe reliable twin pawl mechanical brake
- Proof tested to 1.5 times rated capacity
- 1.5m height of lift as standard but can be chained to exact requirements

Tiger 250kg Lever Hoists (LH-0025) & 500kg Lever Hoist (LH-0050)

• Supplied with useful belt bags


Tiger 250kg Chain Block – CB-0025 One of the smallest and lightest chain blocks available

- Guaranteed light load protection
- Double cover protection for brake chamber
- Drop forged & heat-treated alloy hooks
- High quality alloy calibrated load chain
- Proof tested to 1.5 times rated capacity
- 3m height of lift as standard but can be chained to exact requirements
- 4:1 Factor of safety





Home of the Tiger pneumatic hoisting, manual hoisting, clamping and winching ranges

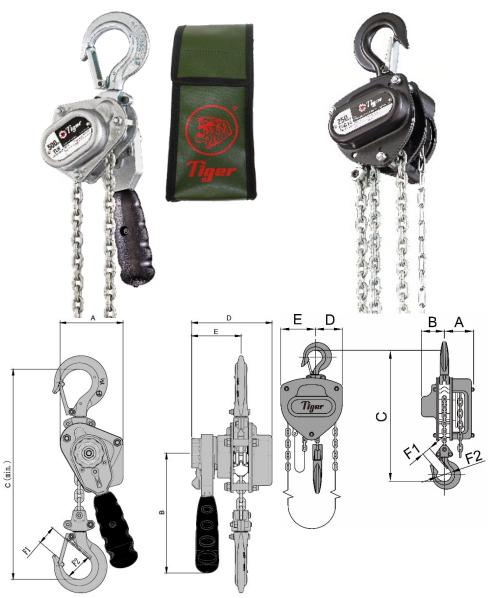

0.25t (LH-0025) & 0.5t lever hoist (LH-0050)

0.25t chain block (CB-0025)

Technical Data

Product Code	Capacity (tonne)	Effort (kg)	Dimensions (mm)							Load Chain		Standard	Mass	Mass for
			Α	В	С	D	E	F1	F2	Diameter (mm)	No. of falls	HOL (m)	@ std HOL (kg)	extra metre HOL (kg)
LH-0025	0.25	15	89	168	265	113	70	22	31	ø4.0	1	1.5	2.9	0.3
LH-0050	0.50	30	89	168	280	113	70	24	38	ø4.0	1	1.5	2.9	0.3
CB-0025	0.25	17	64	40	240	36	60	22	31	ø4.0	1	3.0	3.8	0.5

Due to our policy of continual product development, dimensions, weights and specifications may change without prior notice. Please check with your Tiger sales team when ordering.

Bespoke designs available on request – contact info@tigerlifting.com for more information.