

www.tigerlifting.com

Home of the Tiger hoisting, clamping, winching and height safety ranges

Tiger Adaptor Hoists









Main Features

- Available for Tiger PROCB14/SS20 chain blocks and PROLH/SS19 lever hoists
- All fittings meet the standards of EN1677 with mechanical values for Grade 10
- Drop forged adaptor for maximum strength certified 4:1 FOS at all angles
- Clevis shackle, Self-locking (safety) hook, reevable egg (master) link or sling hook fitting available
- Overload protection available
- For lifting at angles (cross hauling/fleeting/drifting) with no deration
- Chain Blocks 500kg 10t capacity
- Lever Hoists 500kg 10t capacity

Tiger Adaptor Hoists are available with our drop-forged clevis adaptor allowing for the interchangeable range of EN1677 Tiger grade 100 at 400°C tempered clevis fittings. These fitting are available for Tiger PROCB14 and SS20 chain blocks and PROLH and SS19 lever hoists.










28 May 2021



www.tigerlifting.com

Home of the Tiger hoisting, clamping, winching and height safety ranges

This Tiger manufactured knuckle configuration gives 360° Rotation and 180° Pivot for maximum flexibility, whilst maintaining our 4:1 factor of safety at all angles.

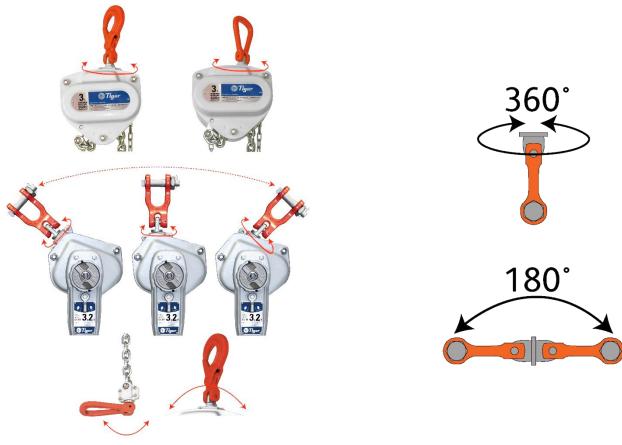

Please see Tiger PROCB14, SS20, PROLH and SS19 data sheets for more technical information and dimensions on the hoist bodies and chain.



Due to our policy of continual product development, dimensions, weights and specifications may change without prior notice. Please check with your Tiger sales team when ordering.

Bespoke designs available on request – contact info@tigerlifting.com for more information.

28 May 2021 Page 2 of 2