


Weld-on Lifting Point with Spring Model No. 8-057



Main Features


- Pivots through 180°
- Manufactured from forged alloy steel, quenched and tempered
- Manufactured and tested in accordance with EN1677-1
- Load rated parts are 100 % magnaflux crack detected
- Individual forged parts are traceable to Test Certification
- Proof tested to 2.5 times the WLL
- All YOKE Lifting points meet or exceed all the requirements of ASME B30.26
- WLL forged onto each product for quick and easy identification
- Lugs designed to assist the welding process
- A protected spring keeps the load ring in a required position. The parts are connected in such a way that they remain captive. The spring also reduces noise caused by vibrations
- Only apply load in the same direction as the pivot direction

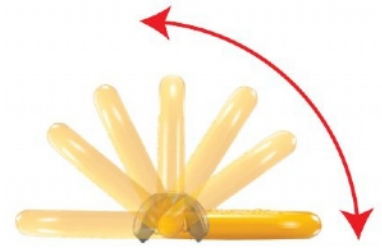

Certification:


Each unit comes fully certified with a test certificate or an EC Declaration of Conformity stating compliance with the essential health and safety requirements of the Machinery Directive 2006/42/EC, the Supply of Machinery (Safety) Regulations 2008 and Section 6 of the Health and Safety at Work Etc Act 1974.

Manufactured and tested in accordance with EN1677-1. All YOKE Lifting points meet or exceed all the requirements of ASME B30.26.

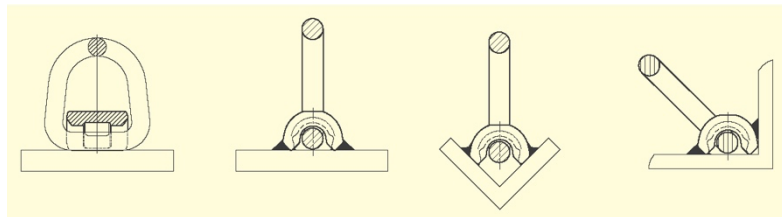

Technical Data

| Product Code | Capacity (tonne) | Dimensions (mm) | | | | | | | | | | | | | Net Weight (kg) |
|--------------|------------------|-----------------|----|----|----|----|-----|----|----|-----|----|----|---|-----|-----------------|
| | | A | B | C | D | E | F | G | H | L | W | HV | a | | |
| 8-057-1T | 1.0 | 83 | 41 | 48 | 14 | 14 | 86 | 27 | 58 | 109 | 50 | 5 | 3 | 0.5 | |
| 8-057-3T | 3.0 | 98 | 48 | 58 | 17 | 17 | 85 | 31 | 54 | 114 | 58 | 6 | 3 | 0.9 | |
| 8-057-5T | 5.0 | 120 | 63 | 66 | 22 | 22 | 118 | 41 | 77 | 157 | 64 | 7 | 3 | 1.3 | |
| 8-057-8T | 8.0 | 121 | 73 | 68 | 26 | 26 | 122 | 53 | 69 | 169 | 60 | 10 | 4 | 2.6 | |
| 8-057-10T | 10.0 | 146 | 73 | 82 | 20 | 30 | 141 | 53 | 88 | 191 | 75 | 10 | 4 | 2.8 | |

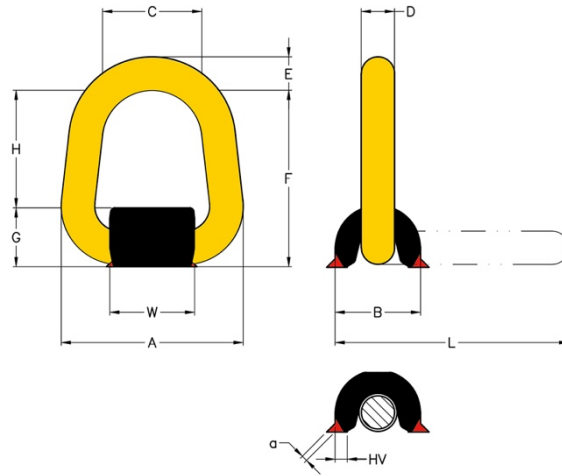

Due to our policy of continual product development, dimensions, weights and specifications may change without prior notice. Please check with your Tiger sales team when ordering.