



ROV Shackle Model No. 8-911

Main Features

- Forged alloy steel, quenched and tempered
- Designed specifically for ROV application
- Individually stamped with the Working Load Limit
- Shackle Bows are painted yellow to ensure ease of sight in water

Certification:

Each unit comes fully certified with a test certificate or an EC Declaration of Conformity stating compliance with the essential health and safety requirements of the Machinery Directive 2006/42/EC, the Supply of Machinery (Safety) Regulations 2008 and Section 6 of the Health and Safety at Work Etc Act 1974.


Manufactured and tested in accordance with EN1677-1. All YOKE Lifting points meet or exceed all the requirements of ASME B30.26.



Technical Data

Product Code	Nominal Size		Capacity (tonnes)	Dimensions (mm)									Net Weight (kg)
	inch	mm		A	E	H	O	P	Q	S	T	W	
8-911-22	7/8	22	6.5	86	58	148	50	63	30	19	10	38	1.8
8-911-26	1	26	8.5	96	69	166	50	65	30	20	10	44	2.5
8-911-28	1 1/8	28	9.5	111	74	190	70	88	35	21	12	46	3.6
8-911-32	1 1/4	32	12.0	121	84	210	70	88	35	25	12	54	4.8
8-911-36	1 3/8	36	13.5	134	92	232	75	96	40	27	15	59	6.8
8-911-38	1 1/2	38	17.0	146	99	254	75	98	40	27	15	60	8.3
8-911-45	1 3/4	45	25.0	178	127	313	90	114	50	30	20	73	16.6
8-911-50	2	50	35.0	197	146	347	106	132	60	30	20	83	23.4

Other sizes available - please ask for details.

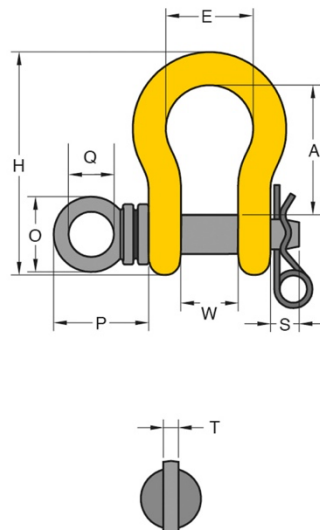

Due to our policy of continual product development, dimensions, weights and specifications may change without prior notice. Please check with your Tiger sales team when ordering.

Our innovation, your safety