



G100 Eye Self Locking Hook Model No. X-025

Main Features

- Quenched and Tempered Alloy Steel
- At least 25 % greater WLL than traditional G80 products
- Manufactured in accordance with EN 1677- 3 and ASME B30.26, ASME B30.10
- Certified by DGUV GS-OA-15-05
- Proof Load tested at 2.5 times the WLL with certification for each batch manufactured
- Design Factor 4:1
- Fatigue rated to 20,000 cycles at 1.5 times the WLL
- Tempering temperature minimum 400°C
- Magnaflux crack detection is performed 100 % on each batch



Certification:


Each unit comes fully certified with a test certificate or an EC Declaration of Conformity stating compliance with the essential health and safety requirements of the Machinery Directive 2006/42/EC, the Supply of Machinery (Safety) Regulations 2008 and Section 6 of the Health and Safety at Work Etc Act 1974.

Manufactured and tested in accordance with EN1677-1. All YOKE Lifting points meet or exceed all the requirements of ASME B30.26.

Technical Data

Product Code	Capacity (tonnes)	For Grade 100 Chain (mm)	Dimensions (mm)						Net Weight (kg)
			A	B	D	K	P	T	
X-025-07	2.5	7, 8	25	11	24	136	34	20	0.8
X-025-10	4.0	10	32	13	30	167	44	26	1.5
X-025-13	6.7	13	40	16	39	207	51	30	3.0
X-025-16	10.0	16	50	21	49	252	60	36	5.8
X-025-22	19.0	22	70	24	63	319	80	49	12.5
X-025-26	26.5	26	80	25	69	343	99	56	15.0

Other sizes available - please ask for details.

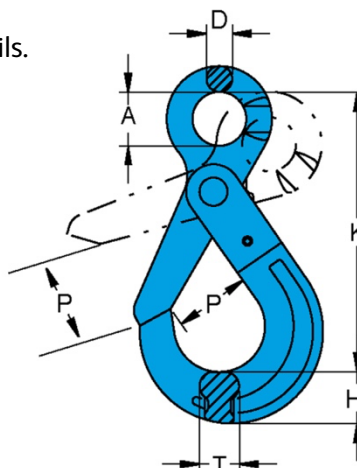

Due to our policy of continual product development, dimensions, weights and specifications may change without prior notice. Please check with your Tiger sales team when ordering.

Our innovation, your safety