



## G100 Clevis Sling Latch Hook Model No. X-043/S



### Main Features

- Quenched and Tempered Alloy Steel
- At least 25 % greater WLL than traditional G80 products
- Manufactured in accordance with EN 1677- 2 and ASME B30.26, ASME B30.10, PAS1061
- Certified by DGUV GS-OA-15-05
- Proof Load tested at 2.5 times the WLL with certification for each batch manufactured
- Design Factor 4:1
- Fatigue rated to 20,000 cycles at 1.5 times the WLL
- Tempering temperature minimum 400°C
- Magnaflux crack detection is performed 100 % on each batch



### Certification:


Each unit comes fully certified with a test certificate or an EC Declaration of Conformity stating compliance with the essential health and safety requirements of the Machinery Directive 2006/42/EC, the Supply of Machinery (Safety) Regulations 2008 and Section 6 of the Health and Safety at Work Etc Act 1974.

Manufactured and tested in accordance with EN1677-1. All YOKE Lifting points meet or exceed all the requirements of ASME B30.26.

### Technical Data

Product Code	Capacity (tonnes)	For Grade 100 Chain (mm)	Dimensions (mm)					Net Weight (kg)
			A	H	K	P1	T	
X-043/S-06	1.4	6	7	18	79	23	15	0.3
X-043/S-07	2.5	7, 8	9	22	98	27	18	0.6
X-043/S-10	4.0	10	12	30	122	34	24	1.1
X-043/S-13	6.7	13	15	37	147	44	30	2.3
X-043/S-16	10.0	16	17	41	166	48	39	3.8
X-043/S-20	16.0	20	24	64	207	57	48	8.7
X-043/S-22	19.0	22	25	61	217	73	52	9.5

Other sizes available - please ask for details.

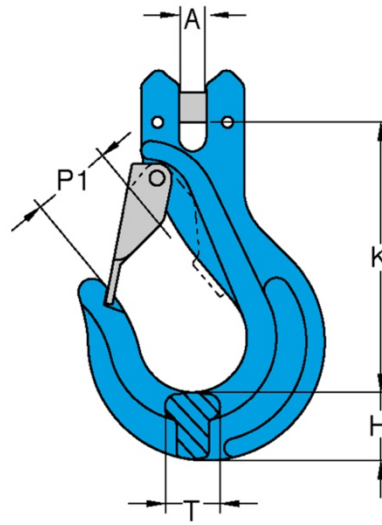

Due to our policy of continual product development, dimensions, weights and specifications may change without prior notice. Please check with your Tiger sales team when ordering.