



Tiger Sling/Lifting Chain


Model No. SC

Main Features Grade 100

- Grade 100 short link lifting chain
- Conforms to ASTM A973/A973-01, EN 818-2 with increased load-bearing capacity by +25 %
- 4:1 factor of safety
- Temperature range from -20°C to +200°C

Main Features Grade 80

- Grade 80 short link lifting chain
- Conforms to EN 818-2
- 4:1 factor of safety
- Temperature range from -40°C to +200°C

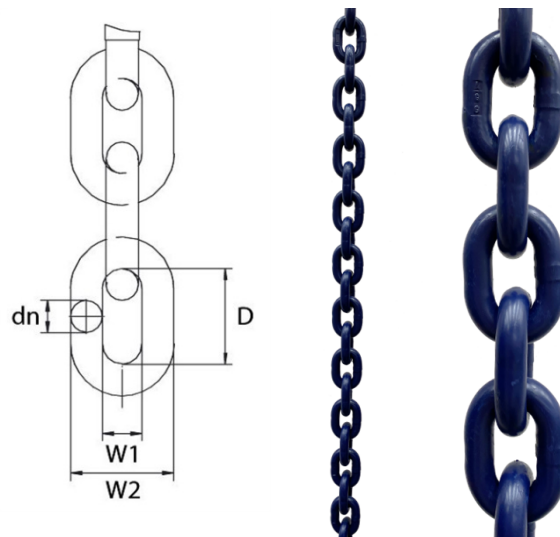

Technical Data

Code	Capacity (tonne)	Chain Diameter (mm)	Link Dimension (mm)			Weight (kg/m)
			D	W1 (min)	W2 (max)	
SC-060V-01	1.4	6	18	8.5	22.2	0.84
SC-080V-01	2.5	8	24	11.0	29.6	1.50
SC-100V-01	4.0	10	30	13.5	37.0	2.40
SC-130V-01	6.7	13	39	16.9	48.1	4.10
SC-160V-01	10.0	16	48	20.8	59.2	6.05
SC-200V-01	16.0	20	60	26.0	74.0	10.00
SC-220V-01	19.0	22	66	28.6	81.4	11.90
SC-260V-01	26.5	26	78	33.8	96.2	15.70
SC-320V-01	40.0	32	96	41.6	118.0	24.30

Code	Capacity (tonne)	Chain Diameter (mm)	Link Dimension (mm)			Weight (kg/m)
			D	W1 (min)	W2 (max)	
SC-070T-01	1.5	7	21	9.1	25.9	1.10
SC-080T-01	2.0	8	24	10.4	29.6	1.40
SC-100T-01	3.15	10	30	13	37	2.20
SC-130T-01	5.3	13	39	16.9	48.1	3.80
SC-160T-01	8.0	16	48	20.8	59.2	5.70

Due to our policy of continual product development, dimensions, weights and specifications may change without prior notice. Please check with your Tiger sales team when ordering.