

Home of the Tiger pneumatic hoisting, manual hoisting, clamping and winching ranges



G80 Connecting Link Model No. 8-015

Main Features

Design factor 4:1 proof tested and certified

Certification:

Each unit comes fully certified with a test certificate or an EC Declaration of Conformity stating compliance with the essential health and safety requirements of the Machinery Directive 2006/42/EC, the Supply of Machinery (Safety) Regulations 2008 and Section 6 of the Health and Safety at Work Etc Act 1974.




Manufactured and tested in accordance with EN1677-1. All YOKE Lifting points meet or exceed all the requirements of ASME B30.26.

Technical Data

Product Code	Capacity (tonne)	For Grade 80 Chain	Dimensions (mm)				
			Α	В	D	K	Net Weight (kg)
8-015-07	2.0	7, 8	15	17	7	45	0.2
8-015-10	3.15	10	26	27	11	69	0.3
8-015-13	5.3	13	30	37	15	91	0.7
8-015-16	8.0	16	36	39	19	101	1.1
8-015-20	12.5	18, 20	42	46	22	122	1.9
8-015-22	15.0	22	49	59	24	152	3.0
8-015-26	21.2	26	55	63	30	164	5.0
8-015-32	31.5	32	69	79	36	203	9.0

Other sizes available - please ask for details.

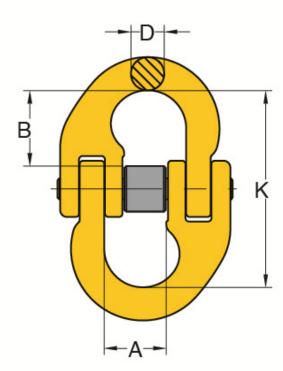

Due to our policy of continual product development, dimensions, weights and specifications may change without prior notice. Please check with your Tiger sales team when ordering.