

Oilfield Hoist Block Model No. 8-591



Main Features

- Manufactured with the highest quality alloy steel
- Available from 4 tonnes to 15 tonnes for wire rope sizes 10mm to 26mm
- Certified by ABS Type Approval
- Part number, wire rope size and working load limit are marked on each block
- Permanent batch codes link to test certificates for easy traceability
- Supplied with sealed tapered bearings for extended product life and faster line speeds
- Safety factor 4:1
- Manufactured by an API Q1 Certified facility



Certification:

Each unit comes fully certified with a test certificate or an EC Declaration of Conformity stating compliance with the essential health and safety requirements of the Machinery Directive 2006/42/EC, the Supply of Machinery (Safety) Regulations 2008 and Section 6 of the Health and Safety at Work Etc Act 1974.

Manufactured and tested in accordance with EN1677-1. All YOKE Lifting points meet or exceed all the requirements of ASME B30.26.


Technical Data

Product Code	Sheave Dia (inch)	Bearing Type	Wire Rope Size (mm)	Capacity (tonnes)*	Dimensions (mm)							Net Weight	
					B	E	F	G	L	R	T	Ibs	kg
8-591-0408	8	**TB	10-13	4.0	34	82	19	226	550	531	19	35	16.0
8-591-0810-13	10	TB	10-13	8.0	64	105	32	276	725	693	32	55	25.0
8-591-0810-15	10	TB	13-15	8.0	64	105	32	276	725	693	32	55	25.0
8-591-1214-19	14	TB	19	12.0	64	105	32	378	823	791	32	95	43.0

*Minimum Ultimate Load is 4 times the Working Load Limit

**TB = Tapered Bearing

Other sizes available – please ask for details

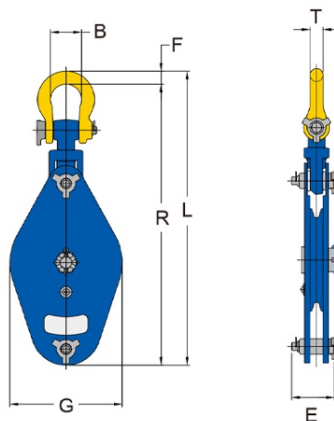

Due to our policy of continual product development, dimensions, weights and specifications may change without prior notice. Please check with your Tiger sales team when ordering.

Our innovation, your safety