



## G100 Clevis Clutch - Locking Type Model No. X-061

### Main Features

- Quenched and Tempered Alloy Steel
- At least 25 % greater WLL than traditional G80 products
- Manufactured in accordance with EN 1677- 1 and ASME B30.26
- Proof Load tested at 2.5 times the WLL with certification for each batch manufactured
- Design Factor 4:1
- Fatigue rated to 20,000 cycles at 1.5 times the WLL
- Tempering temperature minimum 400°C
- The use of Clevis Clutch still allows 100 % of the chain sling capacity
- With the locking system and spring locking pin design to enhance security and prevent the chains from disengaging



### Certification:


Each unit comes fully certified with a test certificate or an EC Declaration of Conformity stating compliance with the essential health and safety requirements of the Machinery Directive 2006/42/EC, the Supply of Machinery (Safety) Regulations 2008 and Section 6 of the Health and Safety at Work Etc Act 1974.

Manufactured and tested in accordance with EN1677-1. All YOKE Lifting points meet or exceed all the requirements of ASME B30.26.

### Technical Data

Product Code	Capacity (tonnes)	For Grade 100 Chain (mm)	Dimensions (mm)						Net Weight (kg)
			A	B	C	D	E	F	
X-061-10	4.0	10	12	12	12	12	34	71	1.0
X-061-13	6.7	13	15	15	16	15	40	92	2.2
X-061-16	10.0	16	21	18	18	19	48	103	3.9

Other sizes available - please ask for details.

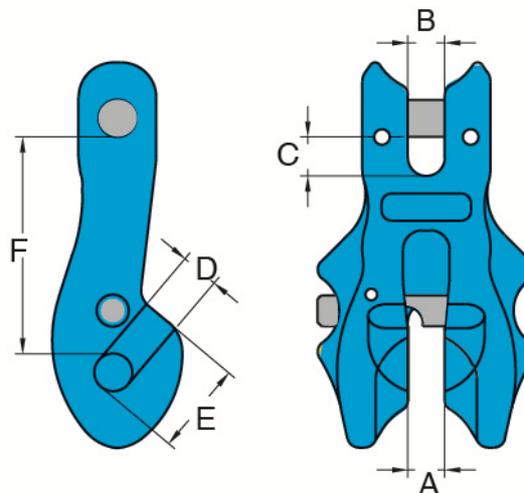

Due to our policy of continual product development, dimensions, weights and specifications may change without prior notice. Please check with your Tiger sales team when ordering.