



Forged Anchor Shackle

Model No. 8-838



Main Features

- Shackles are Type Approved by DNV
- Forged carbon steel with alloy pin
- Size and Working Load Limit permanently shown on each shackle
- Batch Code shown on each shackle which links to Test Certificate and quality traceability
- 100 % magnaflux crack detection during manufacturing
- 20,000 cycle fatigue rated to 1.5 times Working Load Limit
- Minimum Ultimate Load is 6 times the Working Load Limit
- Maximum Proof Load is 2 times the Working Load Limit
- Available with Supra digital chip – powered by RiConnect

Certification:


Each unit comes fully certified with a test certificate or an EC Declaration of Conformity stating compliance with the essential health and safety requirements of the Machinery Directive 2006/42/EC, the Supply of Machinery (Safety) Regulations 2008 and Section 6 of the Health and Safety at Work Etc Act 1974.

Manufactured and tested in accordance with EN1677-1. All YOKE Lifting points meet or exceed all the requirements of ASME B30.26.

Technical Data

Product Code	Nominal Size	Capacity (tonnes)	Dimensions (mm)							Net Weight (kg)
			A	B	D	E	G	H	W	
8-838-08	8	0.75	31	8	9.5	21	19	54	12	0.1
8-838-10	10	1	36	10	11	26	23	65	16	0.1
8-838-11	11	1.5	43	11	13	30	27	75	19	0.2
8-838-13	13	2	47	13	16	33	30	85	20	0.4
8-838-16	16	3.25	61	16	19	43	38	106	27	0.7
8-838-19	19	4.75	72	19	22	50	46	126	33	1.0
8-838-22	22	6.5	86	22	26	58	53	148	38	1.7
8-838-26	26	8.5	96	26	28	68	61	166	44	2.4
8-838-28	28	9.5	111	28	32	74	68	190	46	3.4
8-838-32	32	12	121	32	36	84	76	210	54	4.8
8-838-36	36	13.5	134	36	38	92	84	232	59	6.5
8-838-38	38	17	146	38	43	99	92	254	60	8.8
8-838-45	45	25	178	47	51	127	106	313	73	17.5
8-838-50	51	35	197	53	57	146	122	347	83	24.2

Other sizes available - please ask for details.

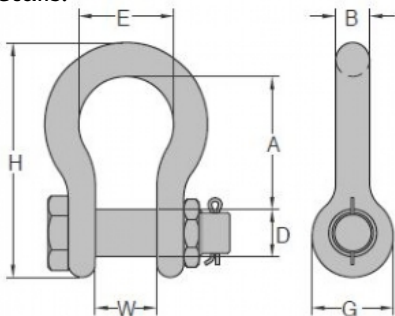

Due to our policy of continual product development, dimensions, weights and specifications may change without prior notice. Please check with your Tiger sales team when ordering.