


Readers

SupraTooth

Model No. RI-1735

Main Features

- Applied with HF RFID tag chips based on the ISO 15693 for reading
- Read count: 1000 entries when fully charged
- Indicator light and alert sound when operating
- Compliance: FCC, CE, TELEC, NCC

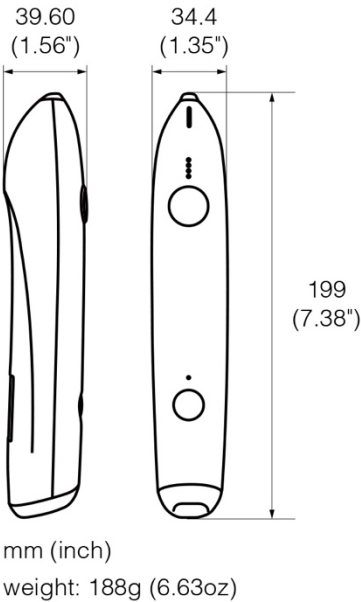


Functionality	
Supported Standards/Tags	ISO 15693
Working Voltage (Charging)	5V DC, 0.5A
Working Frequency	HF - 13.56 MHz
USB Port	Type C
Physical	
Material and Colour	PC, White
Data Transfer Interface	HID Bluetooth
Battery type & Capacity	Lithium battery, 5800 mAh
Operational	
Working Temperature	Charging: 10°C - 45°C Discharging: -20°C - 60°C
Storage Temperature	Less than 3 months -20°C - 40°C 75 % RH max
Dimensions	
Product Net Weight	188 g (6.63oz)
Product Size	198 x 34 x 40 mm

SupraHana

Model No. RI-1762

Main Features

- Compatible with SupraTag
- Easy to plug-n-play
- Connects directly to USB ports and send data as keystrokes
- Compatible with Windows and Macintosh

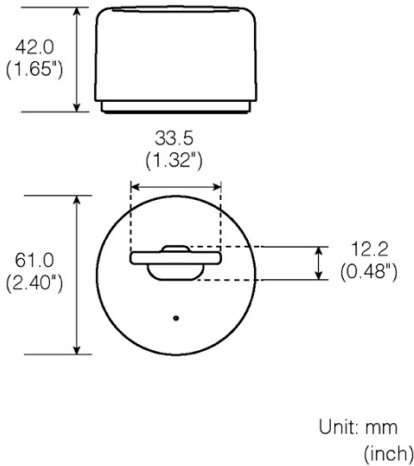


Functionality	
Working Voltage	5V DC
Working Frequency	HF - 13.56 MHz
USB Port	Type-A
Physical	
Material and Colour	ABS, White
Wire Length	1.8m
Operational	
Working Temperature	-20 - 60°C
Storage Temperature	0 - 60°C
Dimensions	
Product Net Weight	86 g (3.03oz)
Product Size	61 x 61 x 42 mm

SupraPin
Model No. RI-1724

Main Features

- Works with any Digital Chip for fast reading
- Easy to plug-n-play
- Connects directly to USB ports and sends data as keystrokes
- Compatible with Windows and Macintosh
- Easy to apply on the production line

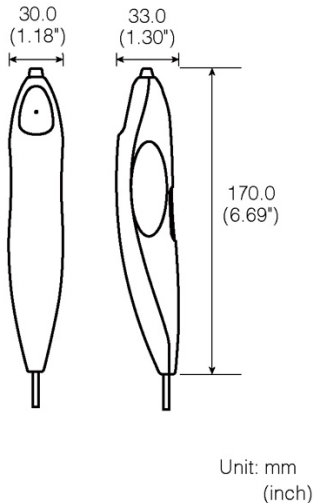

Functionality	
Working Voltage	5V DC
Working Frequency	HF - 13.56 MHz
USB Port	Type-A
Physical	
Material and Colour	ABS, White
Wire Length	1.8m
Operational	
Working Temperature	-20 - 60°C
Storage Temperature	0 - 60°C
Dimensions	
Product Net Weight	95g (3.35oz)
Product Size	170 x 30 x 35 mm