

DA Eye Self Locking Hook Model No. DA-025

Main Features

- Forged alloy steel, quenched and tempered
- Tested and manufactured in accordance with EN 1677 and Norsok R002
- Certified by DNV GL-ST-0378
- Fatigue rated to 20,000 cycles at 1.5 times the Working Load Limit (WLL)
- Charpy tested in accordance with DNV GL-ST-0378
- Designed with recessed trigger, providing the locking mechanism being protected against inadvertent opening due to entanglement with any obstruction during lifting
- Design factor 4:1 and 5:1
- Latch mechanism is self-locking under loading
- Charpy test of 42 joules (31ft. lbs.) at -20°C (-4°F)



DNV GL-ST-0378
(Offshore and Platform Lifting Appliance)


Certification:

Each unit comes fully certified with a test certificate or an EC Declaration of Conformity stating compliance with the essential health and safety requirements of the Machinery Directive 2006/42/EC, the Supply of Machinery (Safety) Regulations 2008 and Section 6 of the Health and Safety at Work Etc Act 1974.

Manufactured and tested in accordance with EN1677-1. All YOKE Lifting points meet or exceed all the requirements of ASME B30.26.

Technical Data

Product Code	Capacity (tonnes)		Dimensions (mm)							Net Weight (kg)
	5:1	4:1	A	D	H	K	P	T		
DA-025-13	5.3	6.7	40	16	39	207	52	30	3.0	
DA-025-16	8.0	10.0	50	21	49	252	60	36	5.8	
DA-025-20	12.8	16.0	61	23	65	293	70	48	10.0	
DA-025-22	15.2	19.0	70	24	63	319	80	49	12.5	
DA-025-26	21.2	26.5	80	25	69	343	99	56	14.7	
DA-025-32	25.2	31.5	90	28	81	401	120	63	26.0	

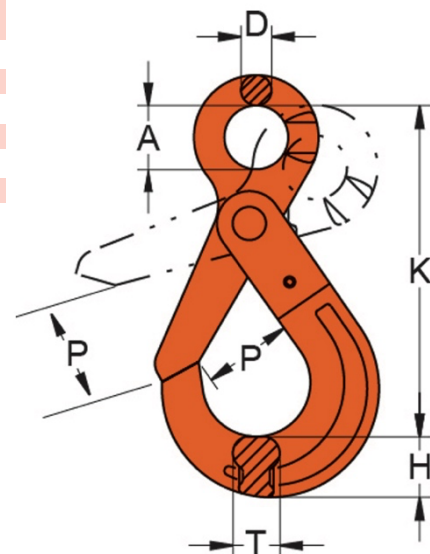

Due to our policy of continual product development, dimensions, weights and specifications may change without prior notice. Please check with your Tiger sales team when ordering.