

DA Swivel Self Locking Hook Model No. DA-027N

Main Features

- Forged alloy steel, quenched and tempered
- Tested and manufactured in accordance with EN 1677 and Norsok R002
- Certified by DNV GL-ST-0378
- Fatigue rated to 20,000 cycles at 1.5 times the Working Load Limit (WLL)
- Charpy tested in accordance with DNV GL-ST-0378
- Designed with recessed trigger and ball bearing, providing the locking mechanism being protected against inadvertent opening due to entanglement with any obstruction during lifting
- Design factor 4:1 and 5:1
- Latch mechanism is self-locking under loading
- Charpy test of 42 joules (31ft. lbs.) at -20°C (-4°F)



DNV GL-ST-0378
(Offshore and Platform Lifting Appliance)


Certification:

Each unit comes fully certified with a test certificate or an EC Declaration of Conformity stating compliance with the essential health and safety requirements of the Machinery Directive 2006/42/EC, the Supply of Machinery (Safety) Regulations 2008 and Section 6 of the Health and Safety at Work Etc Act 1974.

Manufactured and tested in accordance with EN1677-1. All YOKE Lifting points meet or exceed all the requirements of ASME B30.26.

Technical Data

Product Code	Capacity (tonnes)		Dimensions (mm)							Net Weight (kg)
	5:1	4:1	A	B	D	H	K	P	T	
DA-027N-13W	5.3	6.7	61	64	23	39	295	51	30	5.0
DA-027N-16W	8.0	10.0	74	93	25	49	369	60	36	8.1
DA-027N-20	12.8	16.0	74	82	25	65	387	70	53	13.0
DA-027N-22	15.2	19.0	97	95	33	63	457	80	49	20.0
DA-027N-26	21.2	26.5	123	115	42	69	535	99	56	32.7
DA-027N-32	25.2	31.5	123	115	42	81	583	120	63	41.0

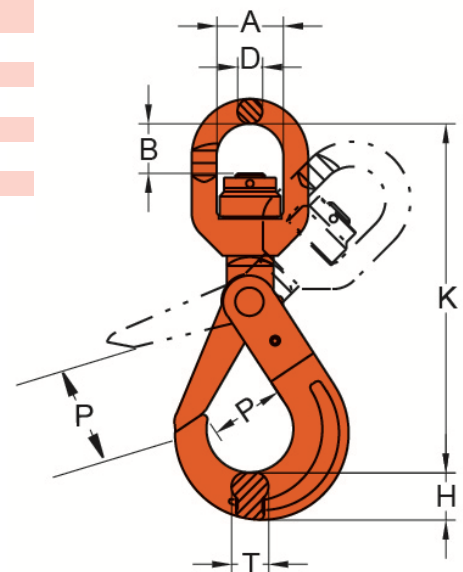

Due to our policy of continual product development, dimensions, weights and specifications may change without prior notice. Please check with your Tiger sales team when ordering.

Our innovation, your safety