


DA Shackle Model No. DA-838

Main Features

- Supra digital chip embedded – powered by RiConnect
- Forged alloy steel, quenched and tempered
- Tested and manufactured in accordance with DNV GL ST-2.7-1, DNV GL-ST-0378, EN 13889, ASME B30.26, U.S. Fed. Spec. RR-C-271F Type IVA, Grade A, Class 3.
- Certified by DNV GL ST-2.7-1
- Fatigue rated to 20,000 cycles at 1.5 times the Working Load Limit (WLL)
- Charpy tested in accordance with DNV GL ST-2.7-1
- Hot dip galvanized
- Charpy test of 42 joules (31ft. lbs.) at -40°C (-40°F) for normal section



**DNV GL ST-2.7-1
(Offshore Containers)**

Certification:

Each unit comes fully certified with a test certificate or an EC Declaration of Conformity stating compliance with the essential health and safety requirements of the Machinery Directive 2006/42/EC, the Supply of Machinery (Safety) Regulations 2008 and Section 6 of the Health and Safety at Work Etc Act 1974.


Manufactured and tested in accordance with EN1677-1. All YOKE Lifting points meet or exceed all the requirements of ASME B30.26.

Technical Data

Product Code	Nominal Size	Capacity (tonnes)	Dimensions (mm)							Net Weight (kg)
			A	B	D	E	G	H	W	
DA-838-13	13	2.00	47	13	16	33	30	85	20	0.4
DA-838-16	16	3.25	61	16	19	43	38	106	27	0.7
DA-838-19	19	4.75	72	19	22	50	46	126	33	1.0
DA-838-22	22	6.50	86	22	25	58	53	148	38	1.7
DA-838-26	26	8.50	96	26	28	68	61	166	44	2.4
DA-838-28	28	9.50	111	28	32	74	68	190	46	3.4
DA-838-32	32	12.00	121	32	36	84	76	210	54	4.8
DA-838-36	36	13.50	134	36	38	92	84	232	59	6.5
DA-838-38	38	17.00	146	38	43	99	92	254	60	8.8
DA-838-45	45	25.00	178	47	51	127	106	313	73	17.5
DA-838-50	50	35.00	197	53	57	146	122	347	83	24.2
DA-838-64	64	55.00	267	66.5	70	184	145	453	105	43.5
DA-838-76	76	85.00	330	76	82.5	200	165	546	127	81.0
DA-838-89	89	120.00	372	92	95.5	229	203	626	133	120.0
DA-838-100	100	150.00	368	104	108	254	229	653	140	153.0

*2t to 35t are type approved of DNV 2.7-1. Minimum Ultimate Load is 6 times the Working Load Limit.

**55t to 150t meet all requirements of DNV 2.7-1. Minimum Ultimate Load is 6 times the Working Load Limit.

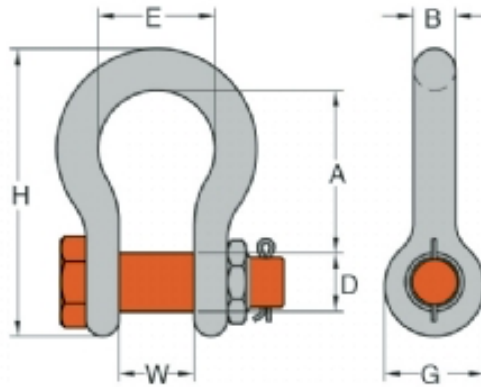

Due to our policy of continual product development, dimensions, weights and specifications may change without prior notice. Please check with your Tiger sales team when ordering.