

G100 Swivel Grip Safe Locking Hook Model No. X-952N



Main Features

- Quenched and Tempered Alloy Steel
- Manufactured in accordance with EN 1677- 3
- Manufactured in accordance with ASTM A952/A952M, DIN PAS 1061
- Proof Load tested at 2.5 times the WLL with certification for each batch manufactured
- Design Factor 4:1
- Fatigue rated to 20,000 cycles at 1.5 times the WLL
- Tempering temperature minimum 400°C
- Magnaflux crack detection is performed 100 % on each batch
- Built with ball bearing and enables full swivel feature under load




Certification:

Each unit comes fully certified with a test certificate or an EC Declaration of Conformity stating compliance with the essential health and safety requirements of the Machinery Directive 2006/42/EC, the Supply of Machinery (Safety) Regulations 2008 and Section 6 of the Health and Safety at Work Etc Act 1974.

Manufactured and tested in accordance with EN1677-1. All YOKE Lifting points meet or exceed all the requirements of ASME B30.26.

Technical Data

| Product Code | For Grade 100 Chain (mm) | Capacity (tonnes) | Dimensions (mm) | | | | | | | | | | Net Weight (kg) |
|--------------|--------------------------|-------------------|-----------------|----|----|----|-----|----|-----|----|-----|------|-----------------|
| | | | A | B | D | H | K | O | P | T | W | | |
| X-952N-10 | 10 | 4.0 | 41 | 35 | 16 | 31 | 226 | 49 | 71 | 27 | 137 | 2.4 | |
| 5.2X-952N-13 | 13 | 6.7 | 46 | 44 | 21 | 39 | 283 | 64 | 80 | 34 | 174 | 5.2 | |
| X-952N-16 | 16 | 10.0 | 61 | 50 | 23 | 47 | 347 | 78 | 114 | 39 | 212 | 8.4 | |
| X-952N-20 | 20 | 16.0 | 74 | 82 | 25 | 55 | 433 | 92 | 127 | 54 | 251 | 14.5 | |
| X-952N-22 | 22 | 19.0 | 97 | 96 | 33 | 59 | 476 | 98 | 151 | 56 | 258 | 20.4 | |

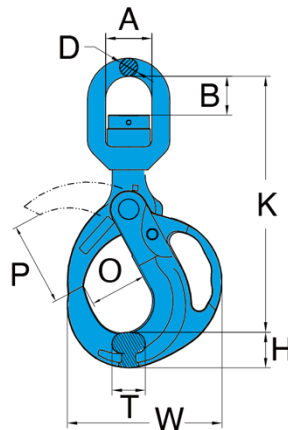

Due to our policy of continual product development, dimensions, weights and specifications may change without prior notice. Please check with your Tiger sales team when ordering.