

G100 Swivel Grip Safe Locking Hook Model No. X-952N



Main Features

- Quenched and Tempered Alloy Steel
- Manufactured in accordance with EN 1677- 3
- Manufactured in accordance with ASTM A952/A952M, DIN PAS 1061
- Proof Load tested at 2.5 times the WLL with certification for each batch manufactured
- Design Factor 4:1
- Fatigue rated to 20,000 cycles at 1.5 times the WLL
- Tempering temperature minimum 400°C
- Magnaflux crack detection is performed 100 % on each batch
- Built with ball bearing and enables full swivel feature under load




Certification:

Each unit comes fully certified with a test certificate or an EC Declaration of Conformity stating compliance with the essential health and safety requirements of the Machinery Directive 2006/42/EC, the Supply of Machinery (Safety) Regulations 2008 and Section 6 of the Health and Safety at Work Etc Act 1974.

Manufactured and tested in accordance with EN1677-1. All YOKE Lifting points meet or exceed all the requirements of ASME B30.26.

Technical Data

Product Code	For Grade 100 Chain (mm)	Capacity (tonnes)	Dimensions (mm)									Net Weight (kg)
			A	B	D	H	K	O	P	T	W	
X-952N-10	10	4.0	41	35	16	31	226	49	71	27	137	2.4
X-952N-13	13	6.7	46	44	21	39	283	64	80	34	174	5.2
X-952N-16	16	10.0	61	50	23	47	347	78	114	39	212	8.4
X-952N-20	20	16.0	74	82	25	55	433	92	127	54	251	14.5
X-952N-22	22	19.0	97	96	33	59	476	98	151	56	258	20.4

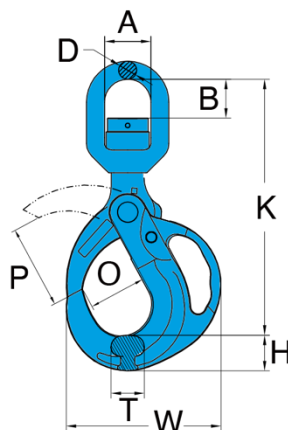

Due to our policy of continual product development, dimensions, weights and specifications may change without prior notice. Please check with your Tiger sales team when ordering.

Our innovation, your safety