



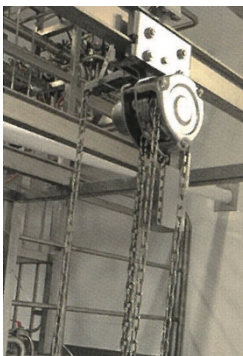

## Tiger Stainless Steel Chain Block Model No. NX

### Main Features

- Suitable for environments including the chemical, medicinal, and food industries where corrosion should be avoided
- This product reduces dust, making it suitable for a clean room environment
- Double brake pawl
- Surface treatment – electrolytic polishing
- Chain length is adjustable
- Load chain: SUS316L
- Hand chain: SUS316
- Covers: SUS304L
- Pin and Bush: SUS420J2
- Hook part and Sheave, Plates: SUS304
- Name Plate: SUS316

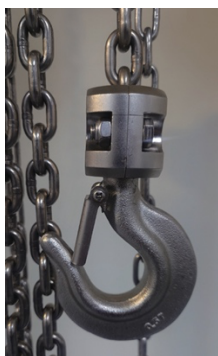

Chain block & trolley which is used in the UK pharmaceutical industry

### Technical Data

| Product Code | Capacity (tonne) | Effort (kg) | Dimensions |      |       |       |      |       |      | Std. Chain Length |            | Load Chain Spec | No of Falls | Std. Net Weight (kg) |
|--------------|------------------|-------------|------------|------|-------|-------|------|-------|------|-------------------|------------|-----------------|-------------|----------------------|
|              |                  |             | H (min)    | L1   | L2    | W1    | W2   | D     | T    | Load Chain        | Hand Chain |                 |             |                      |
| NX-005-SS    | 0.5              | 18.0        | 355.0      | 65.0 | 85.0  | 84.5  | 62.0 | ø38.0 | 27.0 | 2.5               | 2.0        | ø6.3            | 1           | 12.5                 |
| NX-010-SS    | 1.0              | 24.0        | 425.0      | 82.5 | 110.5 | 91.8  | 72.8 | ø46.0 | 32.0 | 2.5               | 2.0        | ø7.9            | 1           | 20.5                 |
| NX-020-SS    | 2.0              | 25.0        | 586.0      | 64.2 | 173.0 | 91.8  | 72.8 | ø64.0 | 51.0 | 3.0               | 2.5        | ø7.9            | 2           | 38.0                 |
| NX-030-SS    | 3.0              | 30.0        | 655.0      | 75.1 | 201.0 | 95.5  | 80.5 | ø64.0 | 51.0 | 3.0               | 2.5        | ø10.0           | 2           | 50.0                 |
| NX-050-SS    | 5.0              | 40.0        | 795.0      | 80.0 | 217.5 | 107.0 | 89.0 | ø86.0 | 70.0 | 3.0               | 2.5        | ø10.0           | 2           | 74.0                 |

