



Tiger Stainless Trolley Model No. NXTP/NXTG


Main Features

- Suitable for environments including the chemical, medicinal, and food industries where corrosion should be avoided
- This product reduces dust, making it suitable for a clean room environment
- Surface treatment – electrolytic polishing
- Plate and Roller: SUS304
- Bearing: SUS420
- Name Plate: SUS316
- Options: This product can be customized according to Beam specification



Technical Data – Plain Trolleys

Product Code	Capacity (tonne)	Dimensions									Min. Curve Radius (mm)	Beam Flange Width (mm)	Net Weight (kg)
		H (min)	H1	L	W1	W2	C	D	T	T1			
NXTP-005-SS	0.5	120.5	227.0	250.0	115.0	115.0	88.5	30.0	18.0	10.0	1200	64-125	13.5
NXTP-010-SS	1.0	147.0	266.5	280.0	122.5	122.5	93.5	44.0	26.0	16.0	1300	74-125	20.0
NXTP-020-SS	2.0	176.0	305.0	310.0	141.0	109.0	103.0	45.0	26.0	19.0	1500	100-150	30.0
NXTP-030-SS	3.0	177.0	323.0	350.0	158.5	111.5	120.0	45.0	26.0	19.0	1600	100-150	38.0

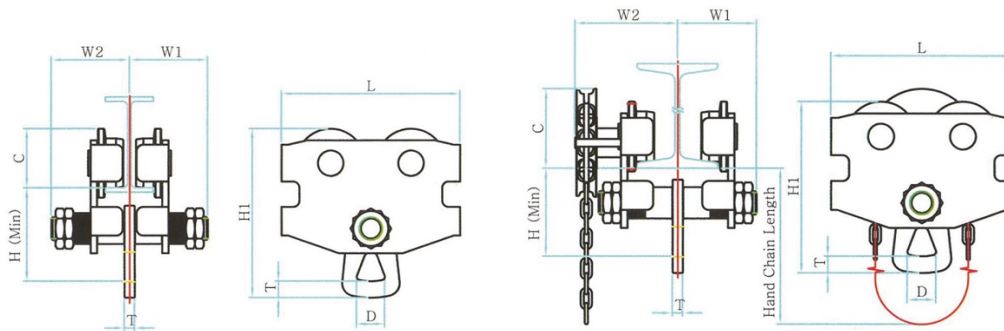

Plain Trolley

Geared Trolley

Technical Data – Geared Trolleys

Product Code	Capacity (tonne)	Dimensions									Standard Chain Length (m)	Min. Curve Radius (mm)	Beam Flange Width (mm)	Net Weight (kg)
		H (min)	H1	L	W1	W2	C	D	T	T1				
NXTG-005-SS	0.5	120.5	227.0	250.0	115.0	152.0	88.5	30.0	18.0	10.0	2.5	1200	64-125	19.8
NXTG-010-SS	1.0	147.0	286.2	280.0	122.5	159.0	113.2	44.0	26.0	16.0	2.5	1300	74-125	27.3
NXTG-020-SS	2.0	176.0	305.0	310.0	141.0	164.5	103.0	45.0	26.0	19.0	2.5	1500	100-150	35.8
NXTG-030-SS	3.0	177.0	327.0	350.0	158.5	165.5	124.0	45.0	26.0	19.0	3.0	1600	100-150	45.7

Due to our policy of continual product development, dimensions, weights and specifications may change without prior notice. Please check with your Tiger sales team when ordering.

Bespoke designs available on request – contact info@tigerlifting.com for more information.