

G100 Swivel Self Locking Ball Bearing Hook Model No. X-027N

Main Features

- Ball bearing performs to fully swivel under load
- Design factor 4:1 proof tested and certified

Certification:

Each unit comes fully certified with a test certificate or an EC Declaration of Conformity stating compliance with the essential health and safety requirements of the Machinery Directive 2006/42/EC, the Supply of Machinery (Safety) Regulations 2008 and Section 6 of the Health and Safety at Work Etc Act 1974.


Manufactured and tested in accordance with EN1677-1. All YOKE Lifting points meet or exceed all the requirements of ASME B30.26.



Technical Data

Product Code	Capacity (tonnes)	For Grade 100 Chain (mm)	Dimensions (mm)							Net Weight (kg)
			A	B	D	H	K	P	T	
X-027N-07	2.5	7, 8	36	29	13	24	186	34	20	1.2
X-027N-10	4.0	10	41	35	16	30	218	44	26	2.0
X-027N-13	6.7	13	46	44	21	39	276	51	30	4.1
X-027N-16	10.0	16	61	50	23	49	329	60	36	7.2

Other sizes available - please ask for details.

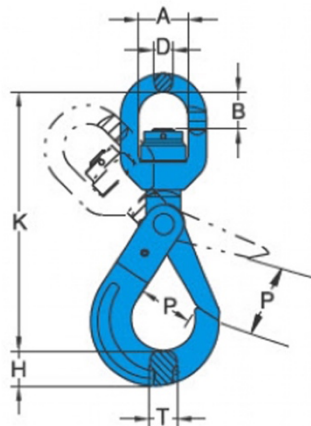

Due to our policy of continual product development, dimensions, weights and specifications may change without prior notice. Please check with your Tiger sales team when ordering.