



## Tiger Mini Range

Rugged steel body construction yet lightweight and portable

### Tiger 250kg Lever Hoists (LH-0025) & 500kg Lever Hoist (LH-0050)



500kg lever hoist with belt bag


- 360-degree handle rotation
- Short stroke and low lever pulling effort
- Easy single-hand “freewheeling” operation
- Drop forged & heat-treated alloy hooks
- Safe reliable twin pawl mechanical brake
- Proof tested to 1.5 times rated capacity
- 1.5m height of lift as standard but can be chained to exact requirements
- Supplied with useful belt bags

### Tiger 250kg Chain Block – CB-0025

One of the smallest and lightest chain blocks available

- Guaranteed light load protection
- Double cover protection for brake chamber
- Drop forged & heat-treated alloy hooks
- High quality alloy calibrated load chain
- Proof tested to 1.5 times rated capacity
- 3m height of lift as standard but can be chained to exact requirements
- 4:1 Factor of safety



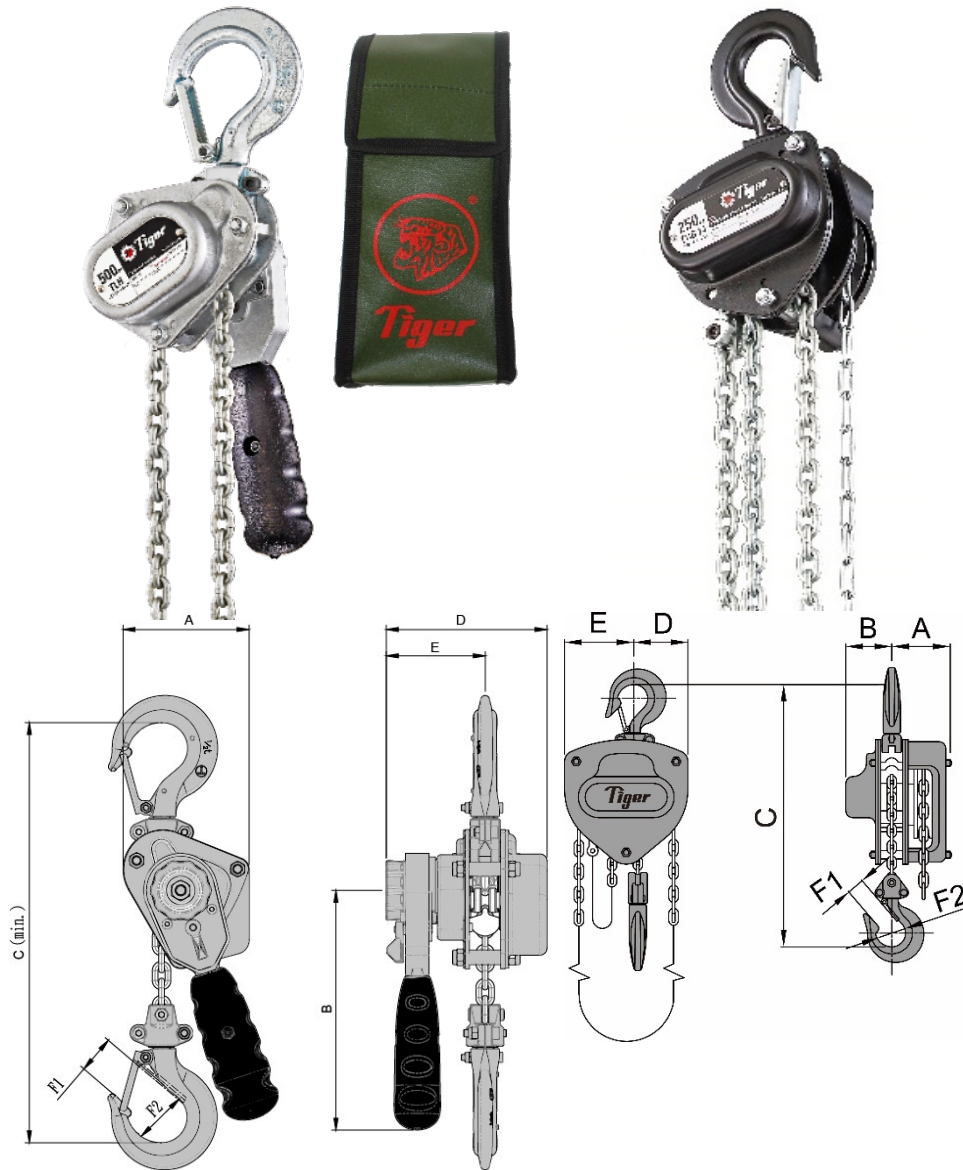

0.25t (LH-0025) & 0.5t lever hoist (LH-0050)

0.25t chain block (CB-0025)

### Technical Data

Product Code	Capacity (tonne)	Effort (kg)	Dimensions (mm)							Load Chain		Standard HOL (m)	Mass @ std HOL (kg)	Mass for extra metre HOL (kg)
			A	B	C	D	E	F1	F2	Diameter (mm)	No. of falls			
LH-0025	0.25	15	89	168	265	113	70	22	31	ø4.0	1	1.5	2.9	0.3
LH-0050	0.50	30	89	168	280	113	70	24	38	ø4.0	1	1.5	2.9	0.3
CB-0025	0.25	17	64	40	240	36	60	22	31	ø4.0	1	3.0	3.8	0.5

Due to our policy of continual product development, dimensions, weights and specifications may change without prior notice. Please check with your Tiger sales team when ordering.

Bespoke designs available on request – contact [info@tigerlifting.com](mailto:info@tigerlifting.com) for more information.