

G80 Half Coupling Link with Coupling Pin and Sleeve Locking Model No. 8-054



Main Features

- Design factor 4:1 proof tested and certified

Certification:

Each unit comes fully certified with a test certificate or an EC Declaration of Conformity stating compliance with the essential health and safety requirements of the Machinery Directive 2006/42/EC, the Supply of Machinery (Safety) Regulations 2008 and Section 6 of the Health and Safety at Work Etc Act 1974.


Manufactured and tested in accordance with EN1677-1. All YOKE Lifting points meet or exceed all the requirements of ASME B30.26.



Technical Data

Product Code	Capacity (tonne)	For Grade 80 Chain	Dimensions (mm)				Net Weight (kg)
			A	D	K	L	
8-054-07	2.0	7, 8	18	9	22	28	0.1
8-054-10	3.15	10	25	11	26	34	0.2
8-054-13	5.3	13	30	16	35	45	0.4
8-054-16	8.0	16	36	19	38	50	0.6
8-054-20	12.5	18, 20	42	22	46	60	1.1
8-054-22	15.0	22	49	24	59	76	1.7

Other sizes available - please ask for details.

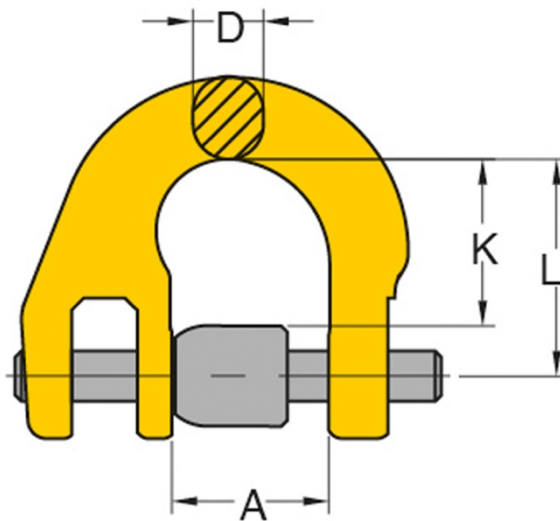

Due to our policy of continual product development, dimensions, weights and specifications may change without prior notice. Please check with your Tiger sales team when ordering.